

Ceiling Fixture

Features

Housing

Die-formed Cold-rolled Steel
 Finish Option: -06 White, -30 Oil Rubbed Bronze

Optical

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp


LED Type: Built-in (Color Temperature Option – 3500K, 5000K)
 CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)

Certification

UL/cUL, ETL/cETL Listed, Suitable for Damp Locations, Energy Star

Warranty

5 Years Warranty on Driver and LED Module

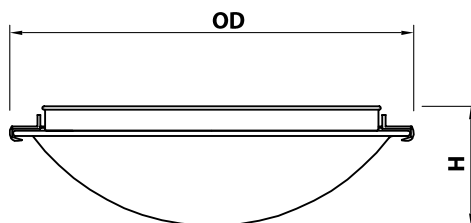

LED Type

Model	Input Voltage	Input Wattage	LED CT / CRI	Lumen (TYP)	Dimension (OD x H)	Finish	Shade	Energy Star
1010D-3000K	120V	17W	3000K / 80	1400	13.0" x 4.3"	Satin Nickel	Alabaster Glass	Yes
1010D-4000K	120V	17W	4000K / 80	1450	13.0" x 4.3"	Satin Nickel	Alabaster Glass	Yes
1009D-3000K	120V ~ 277V	23W	3000K / 80	1600	16.0" x 4.8"	Satin Nickel	Alabaster Glass	
1009D-4000K	120V ~ 277V	23W	4000K / 80	1610	16.0" x 4.8"	Satin Nickel	Alabaster Glass	

CFL Type

Model	Input Voltage	Finish	Shade	Dimension (OD x H)	Lamp	Energy Star
1011PG-123-62	120V	Satin Nickel	Alabaster Glass	10.3" x 4.3"	1 x 23W GU24	Yes
1010PG-213-62	120V	Satin Nickel	Alabaster Glass	13.0" x 4.3"	2 x 13W GU24	Yes
1010PG-223-62	120V	Satin Nickel	Alabaster Glass	13.0" x 4.3"	2 x 23W GU24	Yes
1009PG-218-62	120V	Satin Nickel	Alabaster Glass	16.0" x 4.8"	2 x 18W GU24	
1008PG-418-62	120V	Satin Nickel	Alabaster Glass	20.0" x 4.8"	4 x 18W GU24	