

1012 1014

Ceiling Fixture



Features

Housing

Die-formed Cold-rolled Steel
 Finish Option: -06 White, -30 Oil Rubbed Bronze

Optical

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp


LED Type: Built-in (Color Temperature Option – 3500K, 5000K)
 CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)

Certification

UL/cUL, ETL/cETL Listed, Suitable for Damp Locations, Energy Star

Warranty

5 Years Warranty on Driver and LED Module

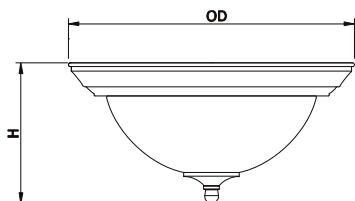

LED Type

Model	Input Voltage	Input Wattage	LED CT / CRI	Lumen (TYP)	Dimension (OD x H)	Finish	Shade	Energy Star
1012D-12W-3000K-62	120V	12W	3000K / 80	1000	11.4" x 4.8"	Satin Nickel	Alabaster Glass	Yes
1012D-12W-4000K-62	120V	12W	4000K / 80	1070	11.4" x 4.8"	Satin Nickel	Alabaster Glass	Yes
1012D-3000K-62	120V	17W	3000K / 80	1400	11.4" x 4.8"	Satin Nickel	Alabaster Glass	Yes
1012D-4000K-62	120V	17W	4000K / 80	1450	11.4" x 4.8"	Satin Nickel	Alabaster Glass	Yes

CFL Type

Model	Input Voltage	Finish	Shade	Lamp	Dimension (OD x H)	Energy Star
1012PG-123-06	120V	White	Alabaster Glass	11.4" x 4.8"	1 x 23W GU24	Yes
1012PG-123-30	120V	Oil Rubbed Bronze	Alabaster Glass	11.4" x 4.8"	1 x 23W GU24	Yes
1012PG-123-62	120V	Satin Nickel	Alabaster Glass	11.4" x 4.8"	1 x 23W GU24	Yes
1014PG-213-06	120V	White	Alabaster Glass	13.0" x 6.2"	2 x 13W GU24	Yes
1014PG-213-30	120V	Oil Rubbed Bronze	Alabaster Glass	13.0" x 6.2"	2 x 13W GU24	Yes
1014PG-213-62	120V	Satin Nickel	Alabaster Glass	13.0" x 6.2"	2 x 13W GU24	Yes