

1018

Ceiling Fixture



Features

Housing

Die-formed Cold-rolled Steel
 Finish Option: -01 Polish Brass, -06 White, -30 Oil Rubbed Bronze, -62 Satin Nickel

Optical

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp


LED Type: Built-in (Color Temperature Option – 3500K, 4000K, 5000K)
 CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)

Certification

UL/cUL, ETL/cETL Listed, Suitable for Damp Locations, Energy Star

Warranty

5 Years Warranty on Driver and LED Module

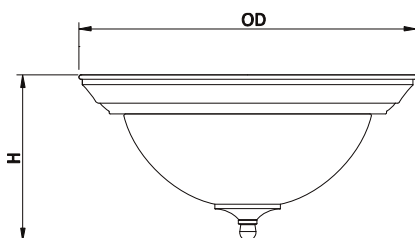

LED Type

Model	Input Voltage	Input Wattage	LED CT / CRI	Lumen (TYP)	Dimension (OD X H)	Finish	Shade	Energy Star
1018D-62-3000K	120V ~ 277V	24W	3000K / 80	1850	15.2" x 6.7"	Satin Nickel	Frosted Swirl Glass	Yes
1018D-62-4100K	120V ~ 277V	24W	4100K / 80	1940	15.2" x 6.7"	Satin Nickel	Frosted Swirl Glass	Yes

CFL Type

Model	Input Voltage	Finish	Shade	Lamp	Dimension (OD x H)	Energy Star
1018PG-223-06	120V	White	Frosted Swirl Glass	2 x 23W GU24	15.2" x 6.7"	
1018PG-223-62	120V	Satin Nickel	Frosted Swirl Glass	2 x 23W GU24	15.2" x 6.7"	
1018PG-223-30	120V	ORB	Frosted Swirl Glass	2 x 23W GU24	15.2" x 6.7"	