

1018

Ceiling Fixture *



Features

Housing

Die-formed Cold-rolled Steel
 Finish Option: -06 White, -30 Oil Rubbed Bronze, -62 Satin Nickel

Optical

Frosted Swirl Glass

Electrical

High Power Factor, Low THD
 -EM Built-in Emergency Lighting
 -BI Bi-Level Lighting

Lamp


LED Type: Built-in (Color Temperature Option – 3000K, 3500K, 4000K, 5000K)
 CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)

Certification

UL/cUL or ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Warranty on Driver and LED Module

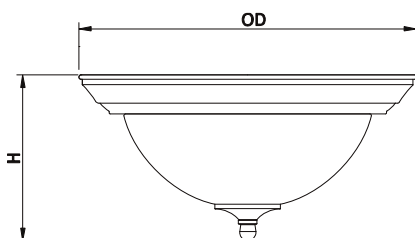

LED Type & Emergency Backup Models

Model	Input Voltage	Input Wattage	CRI	Lumen (TYP) / CT	Dimension (OD X H)	Finish	Shade	Energy Star
1018D-3000K	120V ~ 277V	23W	> 80	2000 / 3000K	15.2" x 6.7"	Satin Nickel	Frosted Swirl Glass	Yes
1018D-3000K-EM	120V ~ 277V	23W	> 80	2000 / 3000K	15.2" x 6.7"	Satin Nickel	Frosted Swirl Glass	Yes

LED Type & Emergency Backup Models

Model	Input Voltage	Input Wattage	CRI	Lumen (TYP) / CT	Dimension (OD X H)	Finish	Shade	Energy Star
1018D-3000K-BI	120V ~ 277V	23W	> 80	2000 / 3000K	15.2" x 6.7"	Satin Nickel	Frosted Swirl Glass	Yes
1018D-3000K-EM-BI	120V ~ 277V	23W	> 80	2000 / 3000K	15.2" x 6.7"	Satin Nickel	Frosted Swirl Glass	Yes

CFL Type

Model	Input Voltage	Finish	Shade	Lamp	Dimension (OD x H)	Energy Star
1018PG-223-06	120V	White	Frosted Swirl Glass	2 x 23W GU24	15.2" x 6.7"	---
1018PG-223-62	120V	Satin Nickel	Frosted Swirl Glass	2 x 23W GU24	15.2" x 6.7"	---
1018PG-223-30	120V	ORB	Frosted Swirl Glass	2 x 23W GU24	15.2" x 6.7"	---