

1019 1019D-PD

Ceiling Fixture



Features

Housing

Die-formed Cold-rolled Steel

Optical

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp

LED Type: Built-in (Color Temperature Option – 3500K, 5000K)


CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)

Certification

UL/cUL, ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Warranty on Driver and LED Module

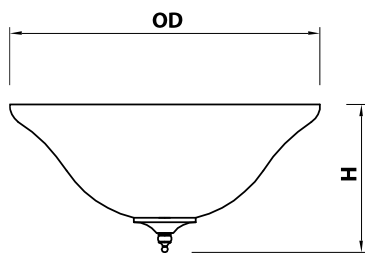

LED Type

Model	Input Voltage	Input Wattage	LED CT / CRI	Lumen (TYP)	Dimension (OD x H)	Finish	Shade	Energy Star
1019D-3000K	120V ~ 277V	18W	3000K / 80	1400	13.0" x 6.1"	Satin Nickel	Alabaster Glass	Yes
1019D-4000K	120V ~ 277V	18W	4000K / 80	1400	13.0" x 6.1"	Satin Nickel	Alabaster Glass	Yes
1019D-PD-3000K	120V ~ 277V	18W	3000K / 80	1400	13.0" x 12.1"	Satin Nickel	Alabaster Glass	
1019D-PD-4000K	120V ~ 277V	18W	4000K / 80	1400	13.0" x 12.1"	Satin Nickel	Alabaster Glass	

CFL Type

Model	Input Voltage	Finish	Shade	Lamp	Dimension (OD x H)	Energy Star
1019PG-218-06	120V	White	Alabaster Glass	2 x 18W GU24	13.0" x 6.1"	
1019PG-218-62	120V	Satin Nickel	Alabaster Glass	2 x 18W GU24	13.0" x 6.1"	