

1019PG

Ceiling Fixture



Features

Housing

Die-formed Cold-rolled Steel

Optical

Alabaster Glass Shade

Electrical


120V

Lamp

GU24 LED Bulb

Certification

UL/cUL, Suitable for Damp Locations

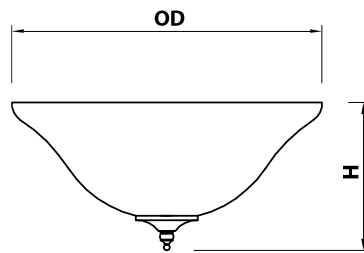

GU24 Type

Model	Input Voltage	Input Wattage	LED CT / CRI	Dimension (OD X H)	Finish	Shade	Energy Star
1019PG-3000K	120V	2 x 9W LED Bulb	3000K / 80	13.0" x 6.1"	Satin Nickel	Alabaster Glass	---
1019PG-4000K	120V	2 x 9W LED Bulb	4000K / 80	13.0" x 6.1"	Satin Nickel	Alabaster Glass	---