

2-0249

Round Puff Ceiling Fixture



Features

Housing

Die-formed Cold-rolled Steel

Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity

Electrical

High Power Factor, Low THD

Lamp


Built-in LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light
Color Temperature Option – 3000K, 3500K, 4000K, 5000K

Certifications

ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Warranty on Driver and LED Module

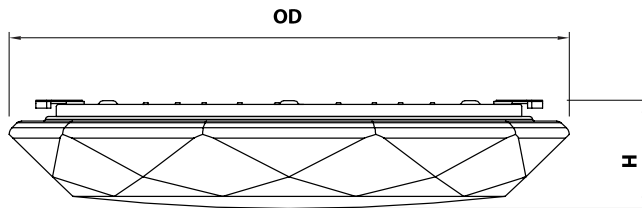

LED Type

Model	Input Voltage	Input Voltage	LED CT	CRI	Lumen (Typ)	Dimension (L X W X H)	Energy Star
2-0249D-3000K	120V	48W	3000K	> 80	3400	23.0" x 3.7"	
2-0249D-4100K	120V	48W	4100K	> 80	3600	23.0" x 3.7"	