

3-0103

Outdoor Light



Features

Housing

Die-formed Cold-rolled Steel

Optical

Shade: Injection Molding with Semi-clear Acrylic

Electrical

LED Driver: High Power Factor (> 0.95), Low THD (< 20%)

Photo Cell Option (Order Code: -PC)


Lamp

LED Type: Integrate LED Module, More Color Temperature Option 4000K, 5000K

GU24 Type: GU24 CFL Bulb, More Color Temperature Option 2700K, 4000K

Certification

UL/cUL, ETL/cETL Listed, Suitable for Damp Locations

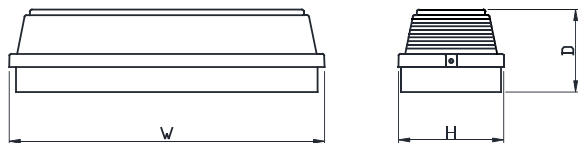

LED Type

Model	Input Voltage	Input Wattage	LED CT/CRI	Lumen (TYP)	Dimension (W x H X D)	Energy Star
3-0103D-xxxxK	120V	15W	3000K / >80	1300	13.2" x 4.5" x 3.5"	Yes

GU24 Type

Model	Input Voltage	Input Wattage	Shade	Lamp	Dimension (W x H X D)	Energy Star
3-0103PG-118	120V	18W	Acrylic	1 x 18W GU24	13.2" x 4.5" x 3.5"	---