

# 3-4121

## Wall Mount / Ceiling Mount, Outdoor



### Features

#### Housing

Die-cast Aluminum with Powder Coated Finish  
 Finish Option: -06 White, -08 Gray

#### Electrical

Built-in Photo Cell Option  
 High Power Factor, Low THD

#### Lamp


LED Type: LED Module, Color Temperature Option 3000K, 3500K, 4000K, 5000K  
 GU24 CFL Bulb Type: Color Temperature Option 2700K, 4000K  
 GU24 LED Bulb: 9W, Color Temperature Option 3000K, 4000K

#### Certification

UL/cUL or ETL/cETL Listed, Suitable for Wet Locations

#### Warranty

5 Years Limited Warranty on Driver and LED

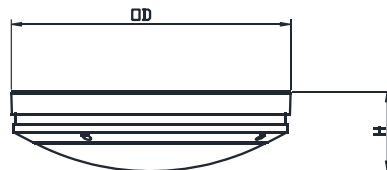

### LED Type

| Model            | Input Voltage | Input Wattage | LED CT/CRI  | Lumen (TYP) | Finish / Shade | Dimension (H x W X E) | Energy Star |
|------------------|---------------|---------------|-------------|-------------|----------------|-----------------------|-------------|
| 3-4121D-05-xxxxK | 120V ~ 277V   | 22W           | 3000K / >80 | 1470        | Black / PC     | 12.8"OD x 3.8"H       | Yes         |

### GU24 Type

| Model     | Input Voltage | Finish | Lamp      | Shade              | Dimension (H x W X E) | Energy Star |
|-----------|---------------|--------|-----------|--------------------|-----------------------|-------------|
| 3-4121-05 | 120V          | Black  | GU24 Bulb | Opal Polycarbonate | 12.8"OD x 3.8"H       |             |

Order Code: -PC Photo Cell