

Features

Housing

Die-formed Cold-rolled Steel and Epoxy Powder Coating
Finish Option: -62 Satin Nickel, -01 Polish Brass, -28 Dark Oak, -30 Oil Rubbed Bronze

Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity
LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light.

Electrical

High Power Factor (> 0.95), Low THD (< 20%)

Lamp


LED Type: Built-in (Color Temperature Option – 3000K, 3500K, 4000K, 5000K)
Rated 50,000 Hours LED Life

Certifications

ETL/cETL Listed, Suitable for Damp Locations, Energy Star

Warranty

5 Years Warranty on Driver and LED Module

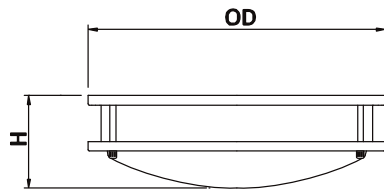

LED Type

Model	Input Voltage	Input Wattage	LED CT	Lumen (TYP)	CRI	Dimension (OD X H)	Energy Star
DC010D-2G-11W-xxxxK	120V	11W	3000K	1000	> 80	10.4" x 4.2"	
DC010D-2G-xxxxK	120V	18W	3000K	1340	> 80	10.4" x 4.2"	
DC012D-2G-11W-xxxxK	120V	11W	3000K	1030	> 80	11.8" x 4.2"	
DC012D-2G-xxxxK	120V ~ 277V	18W	4000K,5000K	1600	> 80	11.8" x 4.2"	Yes
	120V ~ 277V	17W	3000K,3500K	1420	> 80	11.8" x 4.2"	Yes
DC014D-2G-xxxxK	120V ~ 277V	24W	3000K	2500	> 80	14.5" x 4.6"	Yes
DC016D-2G-xxxxK	120V ~ 277V	30W	3000K	3150	> 80	16.0" x 4.9"	Yes
DC018D-2G-xxxxK	120V ~ 277V	38W	3000K	4010	> 80	17.8" x 4.9"	Yes
DC021D-2G-xxxxK	120V ~ 277V	40W	3000K	4500	> 80	20.5" x 5.0"	Yes
DC238D-xxxxK	120V ~ 277V	40W	3000K	4500	> 80	24.1" x 5.0"	Yes