

DC012-2G-D_DC014-2G-D_DC018-2G-D



Ceiling Fixture

Features

Housing

Die-formed Cold-rolled Steel and Epoxy Powder Coating
 Finish Option: -62 Satin Nickel, -01 Polish Brass, -06 White, -30 Oil Rubbed Bronze

Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light.

Electrical

High Power Factor, Low THD

Built-in Emergency Lighting

Bi-level Lighting

Lamp


LED Type: Built-in (Color Temperature Option – 3500K, 5000K)

Certifications

ETL/cETL Listed, Energy Star

Warranty

5 Years Warranty on Driver and LED Module

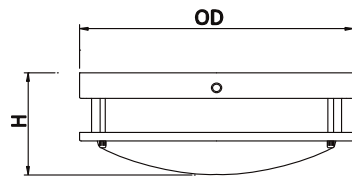

Emergency Backup Models

Model	Input Voltage	Input Wattage	LED CT / CRI	CRI	Lumen (TYP)	Dimension (OD X H)	Energy Star
DC012D-2G-D-xxxxK-EM	120V	18W	3000K or 4000K	> 80	1340	11.8" x 4.5"	Yes
DC014D-2G-D-xxxxK-EM	120V ~ 277V	24W	3000K or 4000K	> 80	2000	14.5" x 5.0"	Yes
DC016D-2G-D-xxxxK-EM	120V ~ 277V	28W	3000K or 4000K	> 80	2300	16.0" x 5.4"	Yes
DC018D-2G-D-xxxxK-EM	120V ~ 277V	35W	3000K or 4000K	> 80	2800	17.8" x 5.4"	Yes

Bi-level Lights with Built-in High Frequency Sensor

Model	Input Voltage	Input Wattage	LED CT / CRI	CRI	Lumen (TYP)	Dimension (OD X H)	Energy Star
DC012D-2G-D-xxxxK-Bi	120V	18W	3000K or 4000K	> 80	1340	11.8" x 4.5"	Yes
DC014D-2G-D-xxxxK-Bi	120V ~ 277V	24W	3000K or 4000K	> 80	2000	14.5" x 5.0"	Yes
DC016D-2G-D-xxxxK-Bi	120V ~ 277V	28W	3000K or 4000K	> 80	2300	16.0" x 5.4"	Yes
DC018D-2G-D-xxxxK-Bi	120V ~ 277V	35W	3000K or 4000K	> 80	2800	17.8" x 5.4"	Yes

Bi-level Lights with Emergency Backup

Model	Input Voltage	Input Wattage	LED CT / CRI	CRI	Lumen (TYP)	Dimension (OD X H)	Energy Star
DC014D-2G-D-xxxxK-EM-Bi	120V ~ 277V	24W	4000K	> 80	2000	14.5" x 5.0"	Yes
DC016D-2G-D-xxxxK-EM-Bi	120V ~ 277V	28W	4000K	> 80	2300	16.0" x 5.4"	Yes
DC018D-2G-D-xxxxK-EM-Bi	120V ~ 277V	35W	4000K	> 80	2800	17.8" x 5.4"	Yes