

**DC012D-2G(JA8) DC014D-2G(JA8) DC016D-2G(JA8)**

Ceiling Fixture, CEC Listed



**Features**

**Housing**

Die-formed Cold-rolled Steel  
 Finish Option: -62 Satin Nickel, -06 White, -30 Oil Rubbed Bronze

**Optical**

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity

**Electrical**

LED Driver: 120V Triac Dimming Type or 120V ~ 277V, 0 ~ 10V Dimming Type  
 Min. Dimming Level: 3%  
 High Power Factor ( > 0.98), Low THD ( < 10%)

**Lamp**


LED Type: Built-in (Color Temperature Option – 3500K, 4000K)  
 LM80, TM21 : 60,000 hours Rating  
 LED Rated Life: > 36000 hours  
 LED CRI > 90 per JA8 Standard  
 Flicker Free: Meets JA10 Standard

**Certifications**

ETL/cETL Listed, Energy Star, CEC Listed

**Warranty**

5 Years Warranty on Driver and LED Module

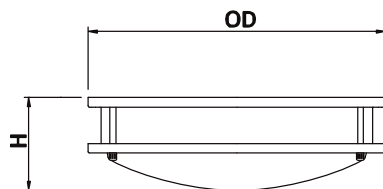

**LED Type**

Model	Input Voltage	Input Wattage	LED CT / CRI	Lumen (TYP)	CRI	Finish	Dimension (OD X H)	Energy Star
DC012D-2G-3000K(JA8)	120V	18W	3000K	1310	>90	Satin Nickel	12.0" x 3.7"	Yes
DC014D-2G-3000K(JA8)	120V	24W	3000K	2000	>90	Satin Nickel	14.5" x 4.5"	Yes
DC016D-2G-3000K(JA8)	120V	30W	3000K	2300	>90	Satin Nickel	16.0" x 4.5"	Yes

**Options**

-EM Emergency Type, -PD Pendant Mount