

# DC614-A DC618-A

## Ceiling Fixture & Pendant



### Features

#### Housing

Die-formed Cold-rolled Steel  
 Shade: Semi-clear White Decorative Fibre Linen

#### Optical

Shade: High Transmission Acrylic Front Panel Create Excellent Light Distribution and Uniformity  
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light.

#### Lamp


LED Type: Built-in (Color Temperature Option – 3000K, 3500K, 4000K, 5000K)  
 CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)

#### Certification

UL/cUL or ETL/cETL Listed

#### Warranty

5 Years Warranty on Driver and LED Module

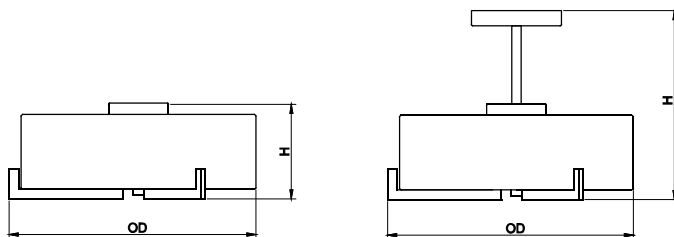

### LED Type

| Model             | Input Voltage | Input Wattage | LED CT / CRI | Lumen (TYP) | Dimension (OD X H) | Shade           |
|-------------------|---------------|---------------|--------------|-------------|--------------------|-----------------|
| DC614D-A-xxxxK    | 120V ~ 277V   | 24W           | 3000K / >80  | 1830        | 17.0" x 5.4"       | Acrylic / Linen |
| DC618D-A-xxxxK    | 120V ~ 277V   | 35W           | 3000K / >80  | 2940        | 20.1" x 5.9"       | Acrylic / Linen |
| DC614D-A-PD-xxxxK | 120V ~ 277V   | 24W           | 3000K / >80  | 1830        | 17.0" x 12.4"      | Acrylic / Linen |
| DC618D-A-PD-xxxxK | 120V ~ 277V   | 35W           | 3000K / >80  | 2940        | 20.1" x 12.9"      | Acrylic / Linen |

### CFL Type

| Model            | Input Voltage | Finish | Shade           | Lamp         | Dimension (OD x H) |
|------------------|---------------|--------|-----------------|--------------|--------------------|
| DC614PG-A-218    | 120V          | 36W    | Acrylic / Linen | 2 x 18W GU24 | 17.0" x 5.4"       |
| DC618PG-A-318    | 120V          | 54W    | Acrylic / Linen | 3 x 18W GU24 | 20.1" x 5.9"       |
| DC614PG-A-PD-218 | 120V          | 36W    | Acrylic / Linen | 2 x 18W GU24 | 17.0" x 12.4"      |
| DC618PG-A-PD-318 | 120V          | 54W    | Acrylic / Linen | 3 x 18W GU24 | 20.1" x 12.9"      |