



**IESNA
SUSTAINING
MEMBER**

Ref. No.: LCZP15040243
Date of issue: May 14, 2015
Version: 1.0
Total pages: 11

Test report of
IES LM-79-08
Approved Method: Electrical and Photometric
Measurements of Solid-State Lighting Products

Rendered to:
Sunpark Electronics Corp
16200 S.Figueroa St., Gardena, Ca 90248

For products:
LED Ceiling

Models:
BH-3D

Test date: May 8, 2015
Test laboratory: LCTECH (Zhongshan) Testing Service Co.,Ltd
2/F., Technology and Enterprise Development Center, Guangyuan Road,
Xiaolan, Zhongshan, Guangdong, China
Laboratory note: N/A

Complied by:
Thomas Liu
Project Engineer
May 13, 2015

Reviewed by:
Richard Li
Technical Manager
May 14, 2015

The duplication of this report or parts of it and its use for advertising purposes is only allowed with permission of the testing laboratory. This report contains the result of the examination of the product sample submitted by the applicant. A general statement concerning the quality of the products from the series manufacture cannot be derived therefore. This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Table of Contents

1 General	3
1.1 Product Information	3
1.2 Standards or methods	4
1.3 Equipment list.....	4
2 Test conducted and method	5
2.1 Ambient Condition	5
2.2 Power Supply Characteristics.....	5
2.3 Seasoning and Stabilization	5
2.4 Electrical Instrumentation	5
2.5 Color Measurement Method	5
2.6 Total Luminous Flux Measurement Method.....	5
2.7 Luminous Intensity Distribution Measurement Method	5
2.8 Spatial Non-uniformity of Chromaticity.....	5
3 Test Result Summary	6
3.1 Electrical data.....	6
3.2 Photometric data.....	6
4 Test Data	7
4.1 Spectral Distribution	7
4.2 Chromaticity Diagram (CIE 1931)	7
4.3 ANSI Chromaticity Quadrangles Diagram	8
4.4 Color Rendering Details	8
4.5 Goniometry Test Data.....	9
4.6 Zonal Lumen Summary	9
4.7 Polar Curves.....	10
4.8 Candela Tabulation	11

1 General

1.1 Product Information

Brand Name	Sunpark
Trade Mark	-
Luminaire Type	LED Ceiling
Model Number	BH-3D
Rated Inputs	AC120V, 50/60Hz
Rated Power	16 W
Rated Initial Lamp Lumens	1100 lm
Declared CCT	2700K
Power Supply	Not Provided
LED Package, Array or Module	ST-2835WPW80-0S3R, Manufactured by Ningbo Sunpu-opto Semiconductor LTD.
Date of Receipt Samples	May 6, 2015
Quantity of Receipt Samples	1 unit

Photo



Picture 1



Picture 2

1.2 Standards or methods

The following standards are partly or totally used or referenced for test:

No.	Name
ANSI/NEMA/ ANSLG C78.377-2011	Specifications for the Chromaticity of Solid State Lighting Products
ANSI C82.77-2002	Harmonic Emission Limits—Related Power Quality Requirements for Lighting Equipment
CIE Pub. No. 13.3-1995	Method of Measuring and Specifying Color Rendering of Light Sources
CIE Pub. No. 15:2004	Colorimetry
IES LM-79-08	Electrical and Photometric Measurements of Solid-State Lighting Products

1.3 Equipment list

ID	Instrument	Model name	Cal. date	Next cal. Date
AC Power supply	LC-I-923	CHP-500	2015-02-05	2016-02-04
AC Power supply	LC-I-987	APW-120N	2015-02-05	2016-02-04
Power analyzer	LC-I-928	WT210	2015-02-09	2016-02-08
Power analyzer	LC-I-954	WT210	2015-02-05	2016-02-04
Multimeter	LC-I-972	Fluke 17B	2014-08-15	2015-08-14
Photometric colorimetric electric system (2 meter sphere)	LC-I-900	SPR3000	Before use	Before use
Standard lamp	LC-I-971	STD-ESN	2014-05-16	2015-05-15
Goniophotometer(with mirror)	LC-I-902	GMS2000	2014-05-14	2015-05-13
Wireless temperature transmitter	LC-I-958	DWRP-B(0)	2014-08-19	2015-08-18
Wireless temperature transmitter	LC-I-959	DWRP-B(0)	2014-08-19	2015-08-18

2 Test conducted and method

2.1 Ambient Condition

The ambient temperature in which measurements are being taken was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, the air flow around the sample(s) being tested did not affect the performance.

2.2 Power Supply Characteristics

The AC power supply had a sinusoidal voltage wave shape at the prescribed frequency (60 Hz) such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item.

The voltage of AC power supply (RMS voltage) applied to the device under test was regulated to within ± 0.2 percent under load.

2.3 Seasoning and Stabilization

No seasoning was performed in accordance with IESNA LM-79-08. And before the measurement, the sample was stabilized until the light output and power variations were less than 0.5% in 30 minutes intervals (3 readings, 15 minutes apart).

2.4 Electrical Instrumentation

The calibration uncertainties of the instruments for AC voltage and current were less than 0.2 percent, and the calibration uncertainty of the AC power meter was less than 0.5 percent (95 % confidence interval, $k=2$).

2.5 Color Measurement Method

Spectral radiant flux was measured by a sphere (2 meter)-spectroradiometer system, and the color characteristics (Color rendering index, correlated color temperature, chromaticity coordinate) were calculated from these by software automatically.

2.6 Total Luminous Flux Measurement Method

Light intensity distribution was measured by a type C goniophotometer (with mirror) which can keep the sample in burn position when the tests conduct, and the total luminous flux was calculated from the intensity data by software automatically.

2.7 Luminous Intensity Distribution Measurement Method

Light intensity distribution was measured by a type C goniophotometer (with mirror) which can keep the sample in burn position when the tests conduct, and the kinds of graph were generated by software automatically.

2.8 Spatial Non-uniformity of Chromaticity

The customer did not require this measurement.

3 Test Result Summary

3.1 Electrical data

Criteria Item	Result (Sphere)	Result (Goniophotometer)
Input Voltage	120.01 V~60Hz	120.04 V~60Hz
Input Current	0.129 A	0.129 A
Total Power	15.40 W	15.40 W
Power Factor	0.995	0.995
Off-state Power	0.0 W	-


3.2 Photometric data

Criteria Item	Result (Sphere)	Result (Goniophotometer)
Total Lumens	-	1132.75 lm
Luminaire Efficacy	-	73.56 lm/W
Correlated Color Temperature (CCT)	2667 K	-
Color Rendering Index (CRI)	83.8	-
R9	15	-
Chromaticity Coordinate (x,y)	x=0.4636,y=0.4130	-
Chromaticity Coordinate (u,v)	u=0.2536,v=0.3453	-
Chromaticity Coordinate (u',v')	u'=0.2536 ,v'=0.5180	-
Duv	-0.0031	-


Note: N/A

4 Test Data


4.1 Spectral Distribution

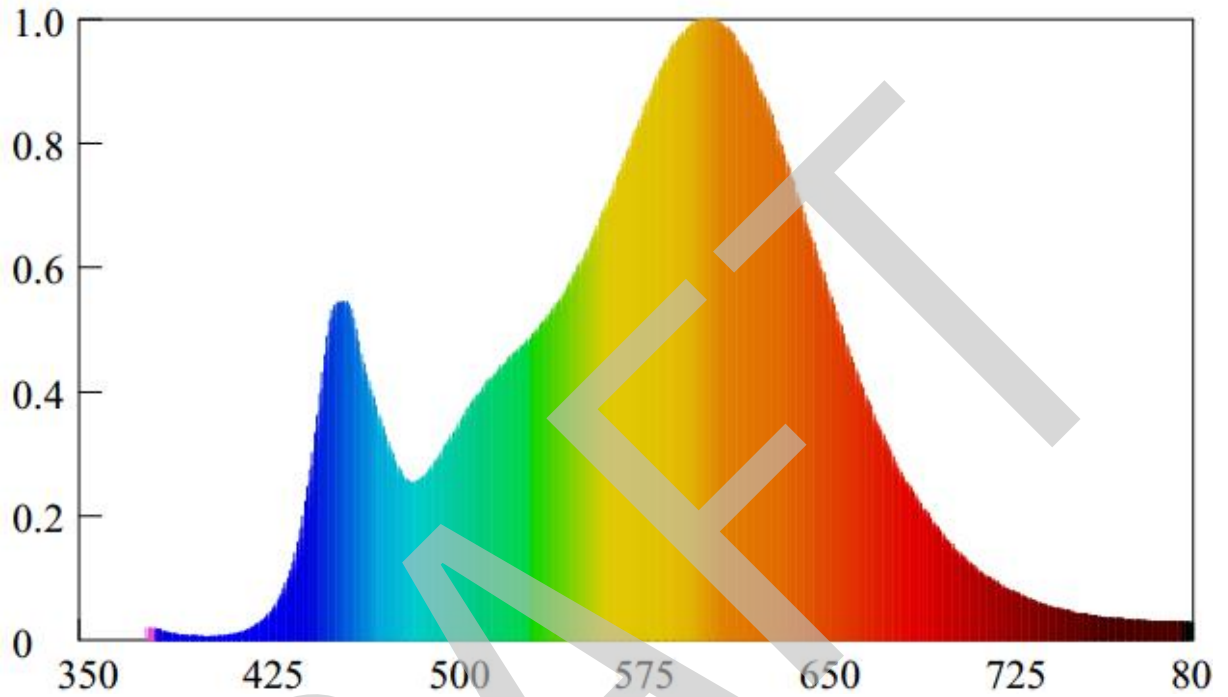

4.2 Chromaticity Diagram (CIE 1931)

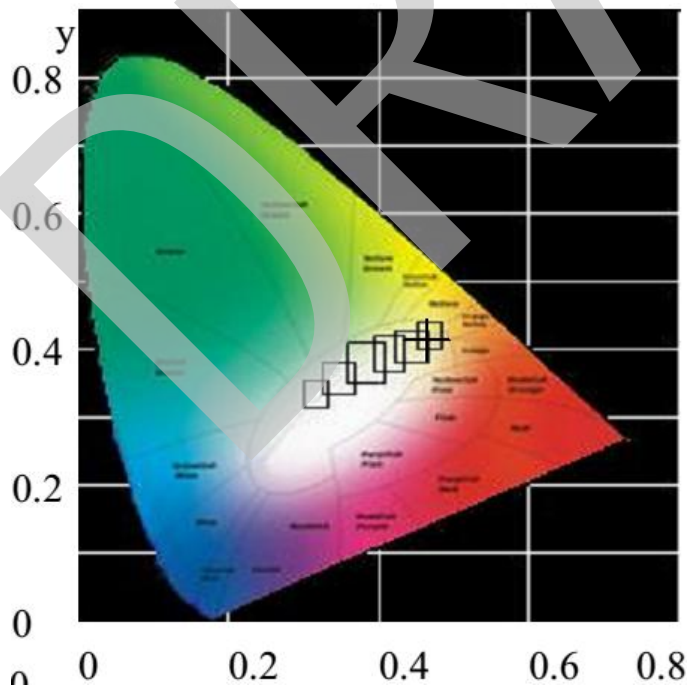

4.3 ANSI Chromaticity Quadrangles Diagram

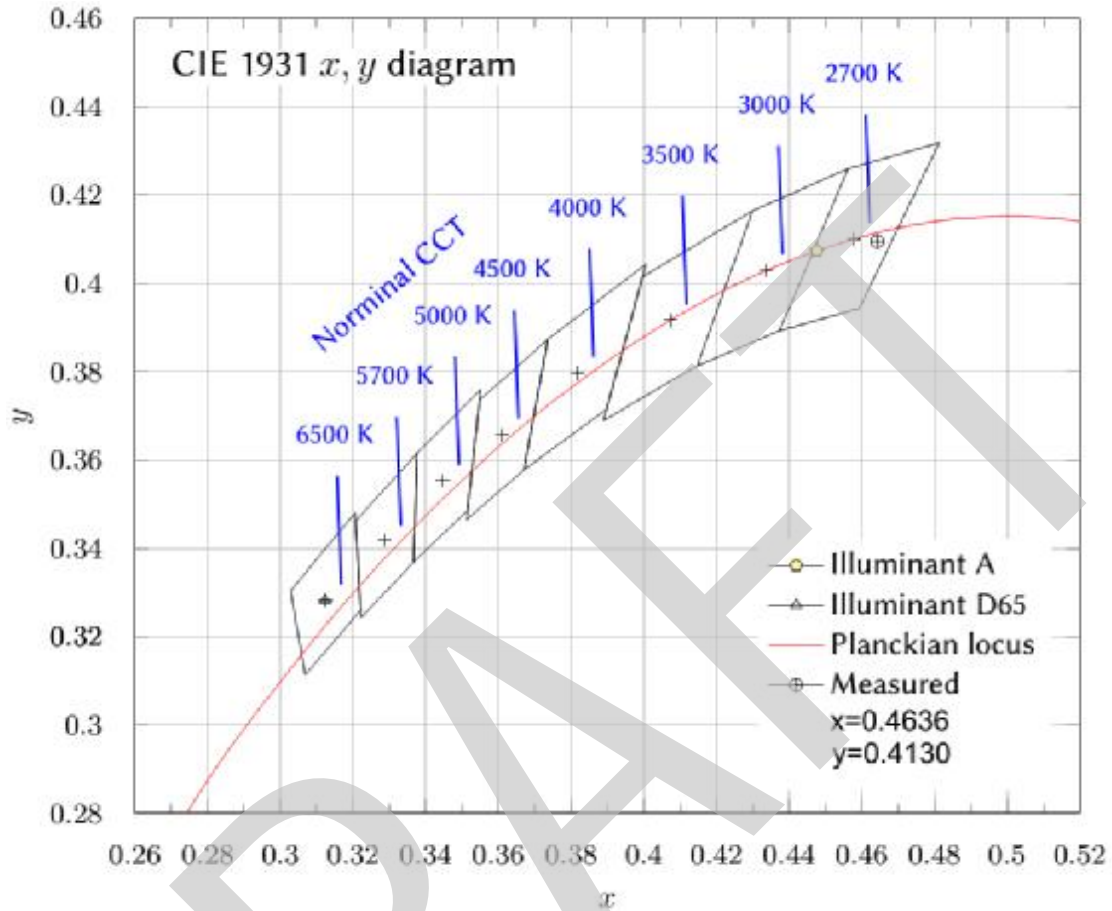

4.4 Color Rendering Details

R1	R2	R3	R4	R5
84	96	92	80	84
R6	R7	R8	R9	R10
94	80	60	15	89
R11	R12	R13	R14	R15
80	77	88	96	77

4.5 Goniometry Test Data

CIE Type	Direct	Basic Luminous Shape	Rectangular w/Sides
Spacing Criteria (0-180)	1.24	Luminous Length	0.245 m
Spacing Criteria (90-270)	1.24	Luminous Width	0.245 m
Spacing Criteria (Diagonal)	1.38	Luminous Height	0.039 m
Test Distance	30.0 m	Luminous Diameter	N/A m

4.6 Zonal Lumen Summary

Zone	Lumens	%Lamp	%Fixt
0-30	265.23	23.4	23.4
0-40	432.6	38.2	38.2
0-60	767.13	67.7	67.7
0-90	1033.74	91.3	91.3
90-120	73.68	6.5	6.5
90-130	85.82	7.6	7.6
90-150	96.98	8.6	8.6
90-180	99.01	8.7	8.7
0-180	1132.75	100	100


Total Luminaire Efficiency = 100%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	32.56
10-20	92.9
20-30	139.77
30-40	167.38
40-50	173.94
50-60	160.58
60-70	130.16
70-80	88.22
80-90	48.23
90-100	31.33
100-110	24.41
110-120	17.94
120-130	12.14
130-140	7.35
140-150	3.8
150-160	1.51
160-170	.42
170-180	.1



4.7 Polar Curves

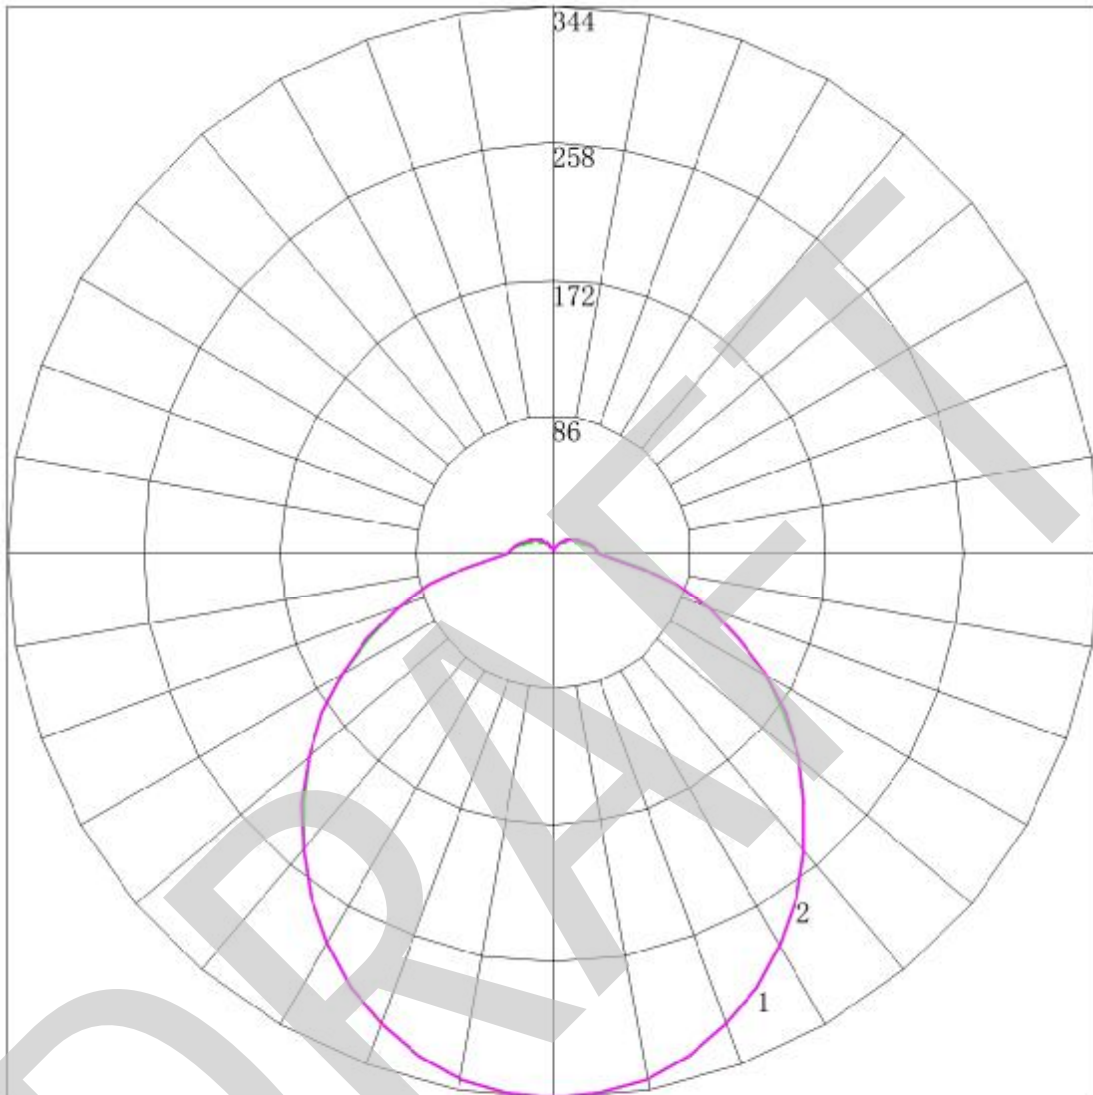

Maximum Candela = 344.4 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180)
2 - Vertical Plane Through Horizontal Angles (90 - 270)

4.8 Candela Tabulation

	<u>0</u>	<u>15</u>	<u>30</u>	<u>45</u>	<u>60</u>	<u>75</u>	<u>90</u>
0	344.40	344.40	344.40	344.40	344.40	344.40	344.40
5	342.82	342.53	343.14	343.03	343.00	342.78	342.34
10	337.37	337.31	337.98	337.81	337.96	337.72	337.23
15	329.22	329.13	329.60	329.52	329.54	329.11	328.77
20	317.55	317.45	318.24	317.91	318.11	317.86	317.35
25	302.92	302.54	303.78	303.69	303.47	303.47	302.84
30	285.57	285.51	286.72	286.96	286.95	286.47	285.19
35	266.70	266.59	268.16	267.88	268.35	267.06	266.65
40	245.80	246.10	247.38	247.71	247.82	246.86	246.28
45	223.73	224.50	225.75	225.81	226.37	225.37	224.38
50	201.25	201.87	203.31	203.69	203.88	202.40	201.31
55	177.69	178.75	180.36	180.82	180.28	179.19	178.20
60	153.42	154.63	156.20	156.63	156.51	155.76	153.70
65	129.00	130.25	132.41	132.70	132.58	131.29	129.61
70	104.50	106.33	108.26	108.28	108.47	106.73	104.62
75	80.27	82.47	84.33	84.94	84.22	82.40	80.30
80	58.24	60.24	62.14	62.79	62.18	59.84	56.92
85	39.41	41.77	43.93	44.18	43.34	40.73	38.16
90	29.10	31.29	33.34	34.03	33.18	30.79	28.35
95	25.68	27.80	29.85	30.59	29.87	27.75	25.98
100	21.21	24.09	27.17	27.84	27.22	25.41	24.00
105	19.46	20.29	24.36	25.21	24.61	22.96	21.90
110	17.48	17.97	21.00	22.53	22.09	20.67	19.80
115	15.77	15.99	17.87	19.67	19.52	18.28	17.69
120	13.96	14.06	15.43	16.81	17.04	15.97	15.63
125	12.16	12.06	13.22	14.27	14.52	13.74	13.62
130	10.54	10.32	11.24	12.00	12.13	11.60	11.82
135	8.87	8.50	9.24	9.84	9.93	9.51	9.81
140	7.34	6.95	7.34	7.92	7.95	7.78	8.06
145	5.99	5.58	5.66	6.10	6.15	6.18	6.45
150	4.64	4.30	4.12	4.34	4.41	4.66	4.97
155	3.47	3.17	2.82	2.88	2.95	3.44	3.58
160	2.39	2.23	1.94	1.71	1.98	2.27	2.46
165	1.44	1.37	1.24	1.15	1.24	1.39	1.43
170	1.04	1.06	1.08	1.08	1.10	1.08	1.12
175	1.04	1.10	1.04	1.08	1.06	1.01	1.07
180	1.13	1.13	1.13	1.13	1.13	1.13	1.13

****End of test report****