

1012 1014

Ceiling Fixture



Features

Housing

Die-formed Cold-rolled Steel
 Finish Option: -62 Satin Nickel, -06 White, -30 Oil Rubbed Bronze

Optical

Frosted Glass (-FG, 13.5" x 7.4") or Alabaster Glass (-AG, 13.5" x 6.5") Shade

Electrical

High Power Factor, Low THD

Lamp


LED Type: Built-in (Color Temperature Option – 3000K, 3500K, 4000K, 5000K)
 CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)

Certification

UL/cUL or ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Warranty on Driver and LED Module

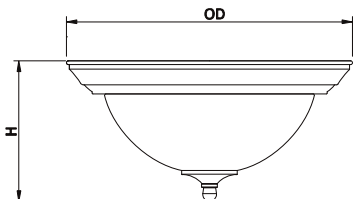

LED Type

Model	Input Voltage	Input Wattage	LED CT / CRI	Lumen (TYP)	Dimension (OD x H)	Finish	Shade	Energy Star
1012D-12W-3000K-62	120V	12W	3000K / >80	1000	11.4" x 5.2"	Satin Nickel	Alabaster Glass	Yes
1012D-3000K-62	120V	17W	3000K / >80	1300	11.4" x 5.2"	Satin Nickel	Alabaster Glass	Yes

CFL Type

Model	Input Voltage	Input Wattage	Lamp	Finish	Shade	Dimension (OD x H)	Energy Star
1012PG-123-62	120V	23W	1 x 23W GU24	Satin Nickel	Alabaster Glass	11.4" x 5.2"	---
1014PG-213-62	120V	26W	2 x 13W GU24	Satin Nickel	Alabaster Glass	13.0" x 6.5"	---